



TOKEN ELECTRONICS IND. CO., LTD.

HONESTY PERFECTION SHARING

✓ **Drum Ferrite Core Coils**

✉ **Inquiry:** rfq@tokenonline.net

Taiwan: No. 137, Sec. 1, Chung Shin Rd., Wu Ku Hsiang, Taipei Hsien, Taiwan, R.O.C
TEL: 886-2-2981 0109; FAX: 886-2-2988 7487

China: 3F South, Zhongxing Industry Bld., Changye Rd., Nanshan District, Shenzhen, Guangdong
TEL: 86-755-2605 5363, 2605 5364; FAX: 86-755-2605 5365



DRUM FERRITE CORE COILS

DRUM FERRITE CORE COILS

Specifications

1. Inductance 2. Operating Frequency 3. Inductance Tolerance

Features:



Winding on extremely big size cores which can produce high inductance value, ideal for frequency divider

Different sizes are available

Mostly used in Speaker Box

Customer design is available

MODEL	USES	FEATURES	SPECIFICATIONS
CD44	VTR, TV	Multi-medium or small current applicable	1.1 μ H ~ 300 μ H 2. 100kHz ~ 25MHz 3. L \pm 10%
CD57			1.1 μ H ~ 2mH 2. 100kHz ~ 25MHz 3. L \pm 10%
CD68			1.1 μ H ~ 5mH 2. 100kHz ~ 25MHz 3. L \pm 10%

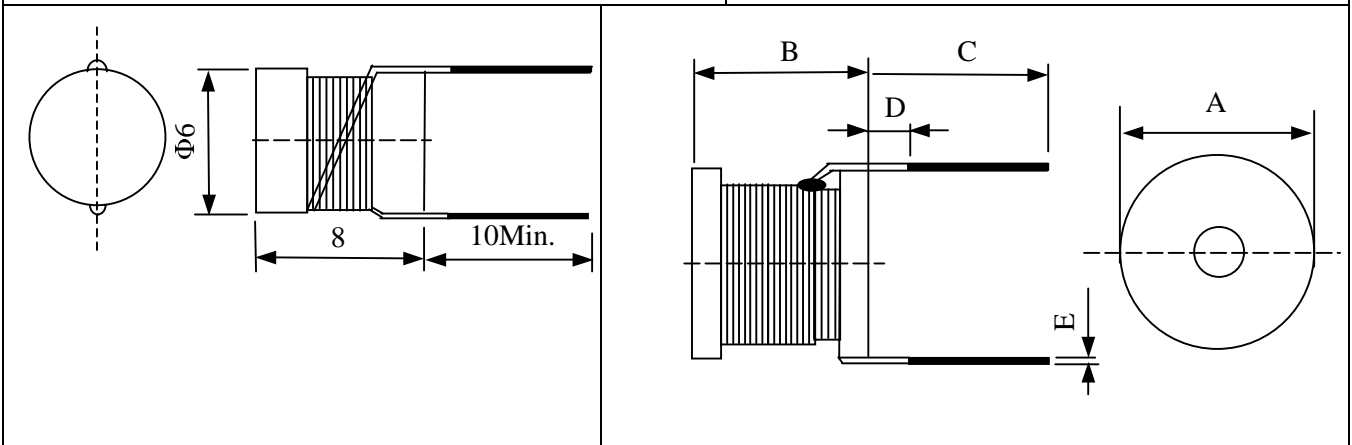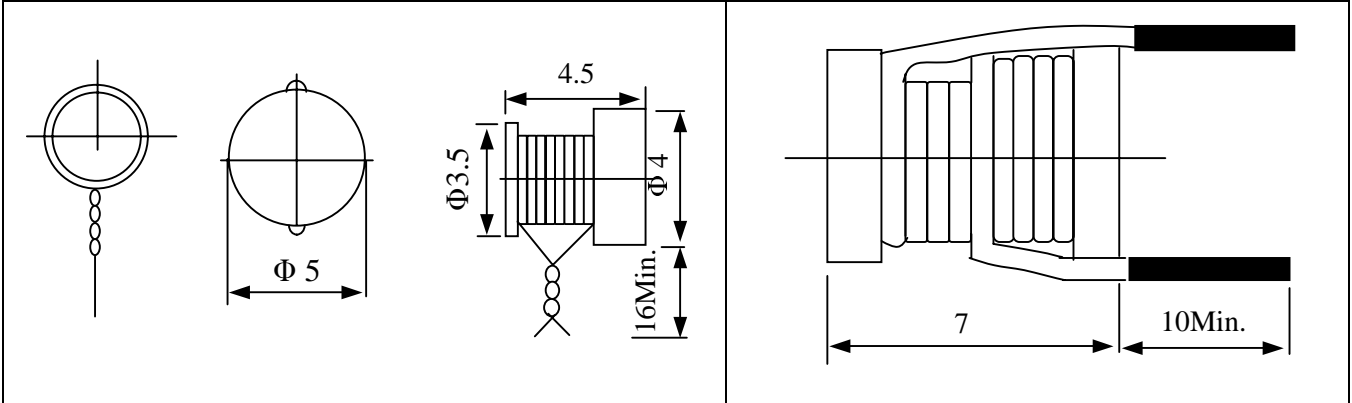

MODEL	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
CD40	40.0 \pm 1	25.0 \pm 0.8	According to customer's requirement		
CD37	37.5 \pm 1	28.0 \pm 0.8			
CD35	35.0 \pm 1	26.0 \pm 0.8			
CD30	30.0 \pm 1	25.5 \pm 0.8			
CD22	22.0 \pm 1	19.0 \pm 0.8			