



# **TOKEN ELECTRONICS IND. CO., LTD.**

***HONESTY PERFECTION SHARING***

✓ **Power Inductors Sealed**

✉ **Inquiry:** [rfq@tokenonline.net](mailto:rfq@tokenonline.net)

**Taiwan:** No. 137, Sec. 1, Chung Shin Rd., Wu Ku Hsiang, Taipei Hsien, Taiwan, R.O.C  
TEL: 886-2-2981 0109; FAX: 886-2-2988 7487

**China:** 3F South, Zhongxing Industry Bld., Changye Rd., Nanshan District, Shenzhen, Guangdong  
TEL: 86-755-2605 5363, 2605 5364; FAX: 86-755-2605 5365




## SEALED POWER INDUCTORS

### SEALER POWER INDUCTORS

**Features:** 1.Magnetic shield or plastic shield type inductor.  
2.Usable as power supply choke coil 3.Taped package for automatic insertion.

**Applications:** This specification applies to various kinds of electronic equipment ,such as car radio ,TV VTR ,computer and all kinds of communication equipment .

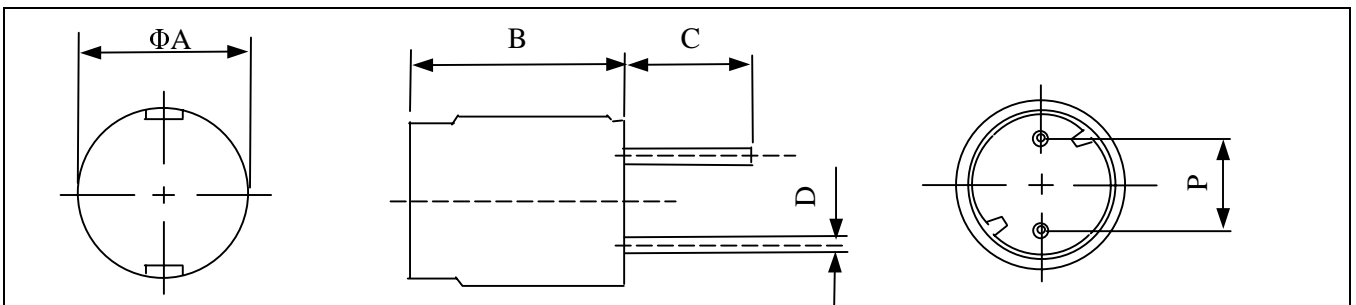

### ORDERING CODE

A: Type (Taping: TXXX; Bulk: cxxx) B: "M" Magnetic Shielding C: Nominal Inductance D: Inductance tolerance symbol  
Txxx /A M/B 101/C K/D

### Specifications

Model	Construction	BODY Dimensions (mm)					Table
		A(mm)±0.5	B(mm) ±0.5	*C(mm) ±0.05	D(mm) ±0.05	P(mm) ±0.5	
TWP7	I	7.3	11	5.0	0.6	5.0	-
TWP8	I	8.3	9.7	5.0	0.6	5.0	-
TWP9	I	9.0	8.3	5.0	0.6	5.0	-
TWPD	I	10.5	13.5	5.0	0.6	5.0	-
TWPG	I	13.5	16.5	5.0	0.6	7.5	-
TWP8-M	I	8.7	10.8	5.0	0.6	0.6	-
TWPA-M	I	10.5	9.0	5.0	0.6	0.6	-

### Specification table of taped radial type choke coils

Model	Inductance	Q (Min)	DCR (Ω)	Measuring Frequency
TWP8	1.0~33000	25	0.013~120	1.0KHz
TWP9	1.0~5600	20	0.014~16.3	1.0KHz
TWPD	3.3~15000	30	0.019~300	1.0KHz
TWPG	10~10000	30	0.023~10	1.0KHz