





High Voltage Resistor

Ceramic Resistors - RMCA, RMCB / 金属陶瓷阻尼电阻器

► Ceramic Resistor Features

Suitable for noise suppressor of engine ignition system.
Reliable with non-disconnection failure. Custom types are available.

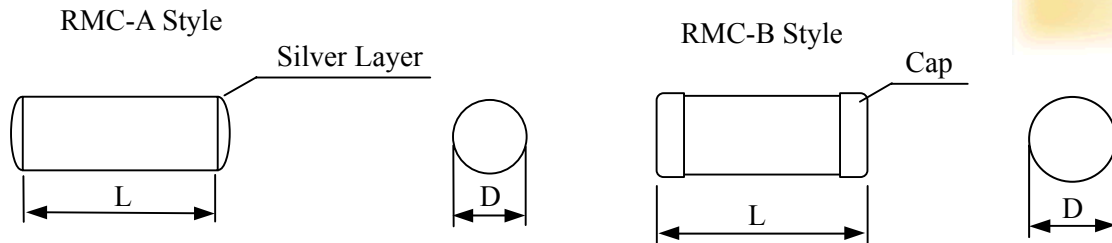

► Ceramic Resistor General Specifications

Model	Style	Rated Wattage	Dimensions (mm)	
			L	D
RMC	A	1	7 ± 1.5	4.0 ± 0.4
			9 ± 1.5	4.0 ± 0.4
	10 ± 1.5		4.0 ± 0.4	
RMC	B	2	11 ± 1.5	4.6 ± 0.5
	A		18 ± 1.5	4.0 ± 0.4
RMC	B	3	19 ± 1.5	4.6 ± 0.5
	A		24 ± 2.0	4.0 ± 0.4
RMC	B	5	25 ± 2.0	4.6 ± 0.5
	A		24 ± 2.0	7.0 ± 0.5
RMC	B		25 ± 2.0	7.6 ± 0.5
	A			

► Ceramic Resistor Electrical Characteristics

Item		RMCA, RMCB			
		1	2	3	5
Power Rating at 25°C (W)					
Operating Temp. Range (°C)		-40 ~ 155			
Resistance Tolerance		K(±10%), M(±20%)			
Resistance Range (Ω)		510 ~ 33K	1K ~ 56K	1K ~ 100K	470 ~ 33K
Max. Working Voltage (V)		300	350	400	500
T.C.R (PPM/°C)	25°C~40°C	-750 ~ 3300	-750 ~ 3300	-750 ~ 3300	-750 ~ 3300
	25°C~155°C	-750 ~ 2600	-750 ~ 2600	-750 ~ 2600	-750 ~ 2600
Max. Pulse Voltage (KV)		8	15	20	25
Moisture Resistance (%)		10	10	10	10

► How to Order



- ① Product Type
- ② Style
- ③ Rated Power
- ④ Resistance Value(Ω)
- ⑤ Resistance Tolerance