



TOKEN ELECTRONICS IND. CO., LTD.

HONESTY PERFECTION SHARING

✓ **Choke Coils - Radial Type (3W)**

✉ **Inquiry:** rfq@tokenonline.net

Taiwan: No. 137, Sec. 1, Chung Shin Rd., Wu Ku Hsiang, Taipei Hsien, Taiwan, R.O.C
TEL: 886-2-2981 0109; FAX: 886-2-2988 7487

China: 3F South, Zhongxing Industry Bld., Changye Rd., Nanshan District, Shenzhen, Guangdong
TEL: 86-755-2605 5363, 2605 5364; FAX: 86-755-2605 5365




RADIAL TYPE CHOKE COILS (3W)

RADIAL TYPE CKOKE COILS (3W)

Features: 1. Contain high-frequency ferrite. 2. Comparatively large rated current

Applications Power supplies, DC-DC converters, TVs, VTRS, Computers, Computer Peripherals, Telephones, Air-Conditions, Home Electric Appliance etc.

Style

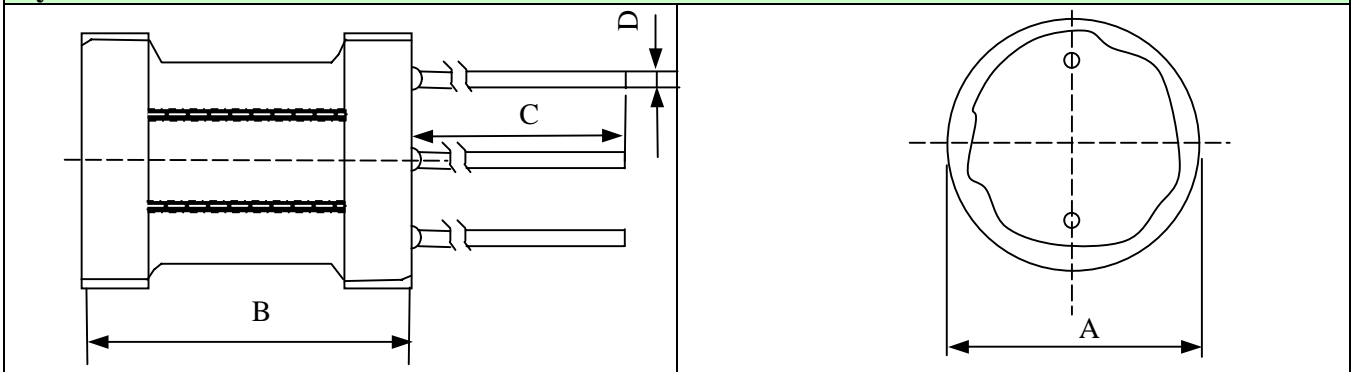

DIMENSION WITH PVC OR UL (UNIT: mm)

Model	A	B	C	D
LHDR3W 0304	3.5±0.5	4.5	15	0.5
LHDR3W 0507	5.5±0.5	7.5	15	0.6
LHDR3W 0608	6.5±0.5	8.5	15	0.6
0LHDR3W 0810	8.5±0.5	10.5	15	0.6
LHDR3W 0912	9.5±0.5	12.5	15	0.8
LHDR3W 1016	10.5±0.5	16.5	15	0.8
LHDR3W 1415	14.5±0.5	15.5	15	1.0
LHDR3W 1618	16.5±0.5	18.5	15	1.0

Specification table of radial type choke coils

MODEL	Inductance(μ H)	Q (Min)	DCR (Ω)	Measuring Frequency
LHDR3W 0304	1.0~5000	45	1~100	1.0 KHz
LHDR3W 0507	1.0~10000	45	5~200	1.0 KHz
LHDR3W 0608	1.0~150000	40	5~280	1.0 KHz
LHDR3W 0810	1.0~180000	40	5~350	1.0 KHz
LHDR3W 0912	1.0~300000	35	5~500	1.0 KHz
LHDR3W 1016	1.0~450000	35	5~580	1.0 KHz
LHDR3W 1415	1.0~500000	30	5~700	1.0 KHz
LHDR3W 1618	1.0~600000	30	5~1000	1.0 KHz